


CHARACTERISTICS

- Simple and essay fixing
- Suitable for non-bonded drywall and ceiling systems
- Easily incorporated within the framework
- Lightweight and durable
- High tensile strength
- Corrosion & weather resistance

APPLICATION GUIDE

- I. Mark horizontal and vertical lines at 600mm maximum centers on the wall for Drywall Brackets positioning;
- II. Fix the brackets directly on the marked lines of the wall at 600mm maximum centers;
- III. Fold up the legs of the brackets for appropriate fixing the stud/channel;
- IV. Bend back the legs of the bracket when needed to avoid stick out past the face of the channel/stud

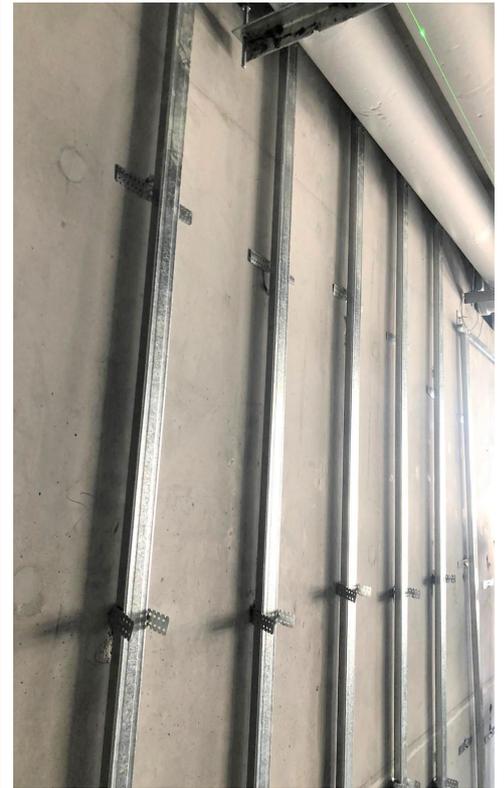

PRODUCT SPECIFICATIONS

Applications	Drywall and Ceiling
Materials	Galvanized Steel
Size	30x303mm
Thickness	1mm
Cavity Widths	25-128mm



Star Beat Building Materials Limited

Flat C, 10/F, Supreme Industrial Building
15-17 Shan Mei Street, Fotan, Shatin
N.T., Hong Kong
Tel : (852) 3617 9160 Fax: (852) 3617 9220
Email : info@starbeat.com
Website : www.star-beat.com