

RUBBER CEILING HANGER

STURFRAME

DECRPTIONS

STURFRAME RUBBER HANGER offers optimum performance at noise attenuation with wide ranges of load up to 300kg and fixing options .The threaded rod is secured into rubber hanger, preventing the contact between the steel frame and the threaded rod and so to isolate vibrations.

FEATURES


- Powder coated steel frame tested to 5 x rated load
- Deflections up to 10 mm
- Can be fitted in drop rod or direct to supporting structure
- High strength and durable
- Corrosion resistance

APPLICATIONS

- Ceilings
- Pipeworks
- Axial Fans and Fan Coil Units
- Ductwork and Attenuators
- Exhaust Systems
- Other Suspended Equipments

INSTALLATION INSTRUCTIONS

Thread the drop-rod through the rubber and bolt in place.

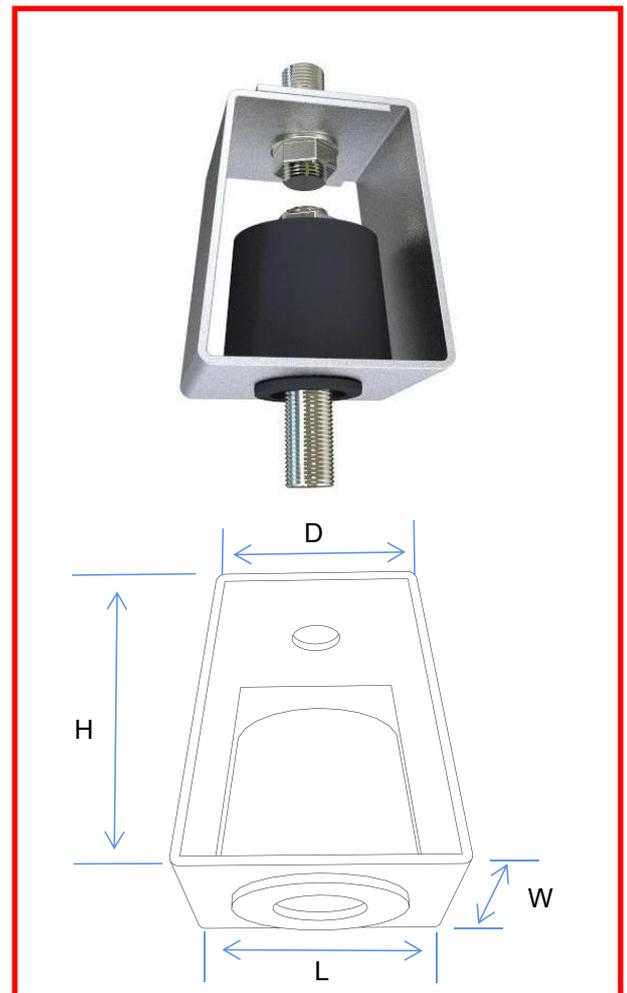

PRODUCT DATA

Model no.	Load	Max. deflection	Duro meter	Dimension			
				H	L	W	D
	kg	mm		mm			
RCH-20	≤20	9	30	70	60	35	50
RCH-35	20~35	9	40	70	60	35	50
RCH-60	35~60	9	50	70	60	35	50
RCH-100	≤100	10	50	115	110	70	85
RCH-200	80~200	10	60	115	110	70	85
RCH-300	150~300	10	70	115	110	70	85



Star Beat Building Materials Limited

Flat C, 10/F, Supreme Industrial Building
 15-17 Shan Mei Street, Fotan, Shatin
 N.T., Hong Kong
 Tel : (852) 3617 9160 Fax: (852) 3617 9220
 Email : info.starbeat@yahoo.com
 Website : www.star-beat.com